

ROBUS®

QUALITY PRODUCTS BY LED GROUP

SULTAN 2X24W LED CORROSION PROOF, IP65, 1.2M, GREY, CCT3 SELECTABLE (3000K/4000K/6500K), 3 STEP DIMMING

RSU4812CCT3DP-24

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.

! Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this product, consult a competent electrician

Note:

Product technical information and specification may change over time without prior notification. For the latest technical information please visit our web site www.ledgrouprobust.com.au

-10°C < Ta < +40°C, 110-240V ~ 50/60Hz, Class I, IP65.

Suitable for mounting on a normally flammable surface.

Default Settings:

Sensitivity: 100%, Lux: 50 Lux, Hold Time: 5 Minutes, Dimming Level: 20%, Standby Time: 60 Mins

Use hand held remote to adjust sensor controls (R360RC: Dual Power Remote Control)

Installation

1. Ensure mains supply is switched off before commencing work
2. Select suitable location for luminaire
3. Safety note! The power supply cord must not be exposed to mechanical damage.
4. Disassemble the fitting base from the fitting.
5. Mark appropriate fixing hole positions on wall, check location of buried cables, pipes and other building services before drilling
6. Drill holes in the ceiling and attach brackets to the ceiling.
7. Feed supply cables through cable entry hole and attach base to brackets
8. Connect supply: Live – Brown, Neutral –Blue and Yellow/Green - Earth
9. Move switch on metal plate to select colour temperature: 3000K, 4000K or 6500K
10. Refit metal plate to base and ensure that it fits securely.
11. Attach diffuser to base using clips provided

WARNING: DO NOT CHANGE CCT WHEN THE FITTING IS ON!!

Accessories Sold Separately

R360RC: Dual Power Remote Control

Microwave sensor


R360RC:

Hold Time: 10 Sec, 1 Min, 5 Mins, 15 Mins, 30 Mins, 60 Mins Dimming: 0%, 10%, 20% & 30%

Sensitivity: 20%, 50%, 75% & 100%

Standby Time: 24 Hours, 1 Min, 30 Mins, 60 Mins

Height of mounting: 2.5m-3.5m, Detection range: Max. radius 8m.

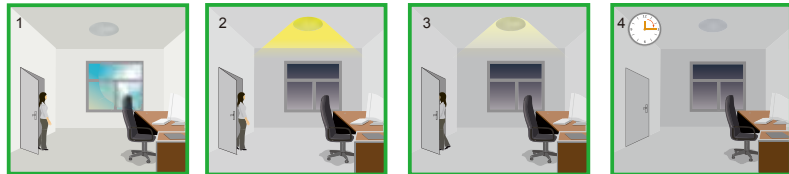

1. With sufficient natural light, the fitting will not switch on when movement is detected (Default : Lux control is 50 Lux).
2. When sensor detects movement and there is insufficient natural light, the fitting will switch on (100% brightness).
3. After activation and no movement detected the fitting goes into Hold Time Period (Default 5 Mins). When Hold Time has Elapsed the fitting enters Standby Time Period (Default 20% Output, 60 Mins).
4. The fitting will switch off after Standby Period has elapsed.

The installation must be carried out by a qualified electrician

LED Group Australasia
9/210 Queensport Road North
Murarrie
QLD 4172
Australia

Tel: 07 3890 5444
Fax: 07 3890 4777
Email: purchases@ledgrouprobust.com.au
Website: www.ledgrouprobust.com.au

Issue 3 100118

