


en


CLIPSAI



41E10PBSWMZ-VW
PDL356PB10MBTZ-VW

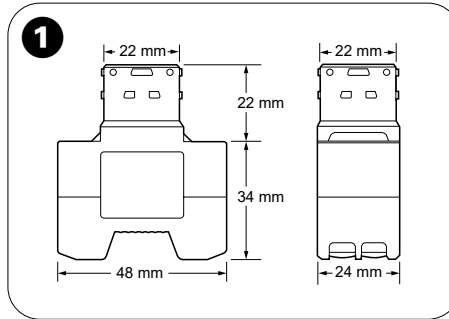

WiZer™

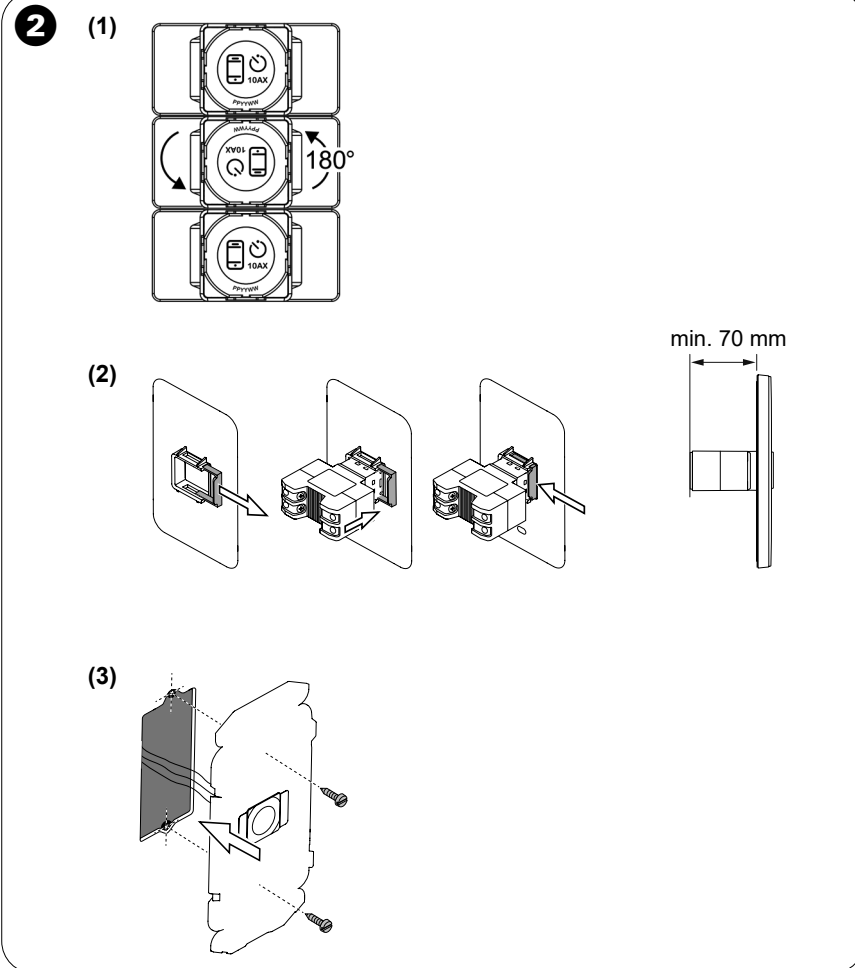Schneider
Electric

JYT55069

en Iconic Connected Switch 10 AX

About this product

The Iconic Connected Switch 10 AX operates as a switch "out-of-the-box", with no configuration needed. The switch is available with Zigbee connectivity.

The switch can be used as one device in a Wiser Hub network. To do this, the switch must be paired to the Wiser Hub via the Wiser Home app.

1 Dimension drawing

Mounting and connection

⚠️ DANGER

HAZARD OF ELECTRIC SHOCK, OR ARC FLASH

- It is illegal for persons other than an appropriately licensed electrical contractors or other persons authorised by legislation to work on the fixed wiring of any electrical installation.
- To comply with all safety standards, the device must be used only for the purpose described in this instruction and must be installed in accordance with the wiring rules and regulation in the location where it is installed.
- Lock out and tag the input circuit before accessing the wiring connections.
- The locking bar on the grids must be set to the closed position to ensure that the device cannot be removed during normal operation.
- There are no user serviceable parts inside the device.

Failure to follow these instructions will result in death or serious injury.

⚠️ CAUTION

EQUIPMENT DAMAGE HAZARD

- Install the device according to instructions in this document.
- Pay attention to the specifications and wiring diagrams related to the installation.
- Do not use the device for any other purpose than specified in this instruction.
- Dropping the device may damage the internal components. Check that the device operates after being dropped or if physical damage is shown.

Failure to follow these instructions can result in minor injury or equipment damage.

NOTICE

EQUIPMENT DAMAGE HAZARD (LOAD AND OPERATION)

- Operation of the device at elevated temperatures or voltages outside of specification (240 V AC and 25 °C) may cause the over-temperature protection circuitry to operate.
- Reduce the size of the connected load or use a different brand of lamp to prevent recurrence.
- Do not operate the product for prolonged periods in extreme conditions.

Failure to follow these instructions can result in equipment damage.

NOTICE




MAXIMUM LOAD RATINGS APPLY

Ensure that the number of low voltage lighting transformers connected to a single device does not exceed the maximum load rating of the device.

Failure to follow these instructions can result in equipment damage.

2 Installation

- (1) Multi-gang orientation
 - When installing in a 3-gang plate, the middle module must face the opposite way to the other 2 modules.
 - The maximum load rating of each module must be derated (see **Derating** section).
- (2) Fit the switch to the grid. Consider the depth of the wall box.
- (3) Mount the grid.

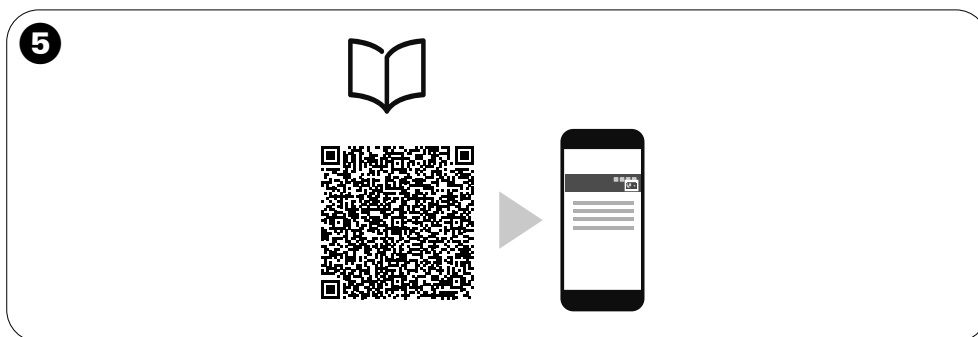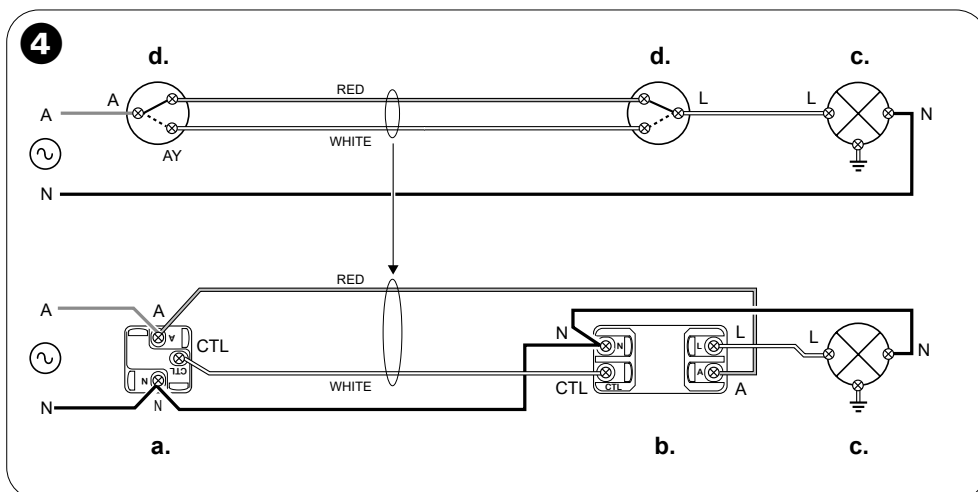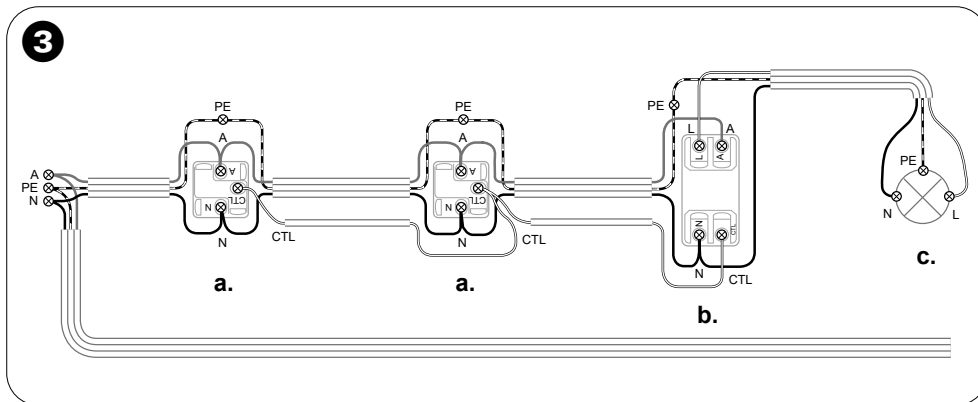

Wiring and connections

- ControlLink Module
- Connected Switch 10 AX
- Load
- 2-way switch

A = Active

N = Neutral

L = Load

CTL = ControlLink

PE = Protective Earth

3 Typical 3-way installation using Iconic Connected Module

NOTE: Set the ControlLink Module to Switch mode - see ControlLink Module instructions.

NOTE:

- All Active connections must be on the same phase.
- Up to 5-way switching (e.g. 1x 10AX Switch plus up to 4x ControlLink Modules, or up to 3x 10AX Switches plus 2x ControlLink Modules). In case of multiple 10AX Switches being installed, each switch must be connected to a separate load.
- Total length of CTL and Active loop: max. 50 m.
- Control and load cables must not be coupled.

4 Retrofit (2-way installation shown)

5 Reading the full device user guide online

Scan the QR code for complete information about the device, including operation, configuration and using the product.

Technical data

Operating voltage	220–240 V AC, 50 Hz	
Max. load rating	15 A	
Resistive load (e.g. incandescent lighting)	15 A	
MV halogen load		
Electronic LV lighting transformers	10 A	
LED lighting drivers		
Linear fluorescent ballasts		
Inductive load (e.g. exhaust fan)	6 A @ $\cos \varphi=0.6$	
M-rating	M.40	
Switching technique	Relay	
Protection	Over temperature:	Yes
	Short circuit:	No
	Over-current fuse:	No
	Thermal protection:	Yes
Design	3-wire	
Multway control	Yes, via ControlLink	
Multway limits	Max. 5-way switching	
ControlLink/Active cable limit	Total length of CTL and Active loop: max. 50 m	
LED indicator	Yes	
Technology type	Zigbee	

Operating frequency:	2.405 GHz to 2.48 GHz
Max. radio-frequency power transmitted:	2.5 mW
Compatible plate ranges	Iconic, Iconic Styl, Iconic Essence, Pro Series
Mounting centres	84 mm pattern plate
Compliance	Safety: AS/NZS 60669.2.1 EMC: AS/NZS 60669.2.1 RF: AS/NZS 4268
Power failure data retention	Internal date/time retained for at least 6 hrs. Settings preserved indefinitely.
Environmental rating	IP20 (designed for indoor use only)
Operating humidity	5 %–90 % relative humidity, non-condensing
Specifications typical at 25 °C	

Derating

For multi-gang applications, derate the maximum load rating of each module as shown in the table below. The load figures are based on a nominal voltage of 220-240 V AC.

Primary modules per plate	Max. load per primary module
1	10 A
2	7.5 A
3	6.5 A

Trademarks

- Zigbee® is a registered trademark of the Connectivity Standards Alliance.
- Wiser™ is a trademark and the property of Schneider Electric SE, its subsidiaries and affiliated companies.

Other brands and registered trademarks are the property of their respective owners.

Customer Care

Warranty information

We warrant this product for 2 years. See Warranty links below.

Schneider Electric (Australia) Pty Ltd

33-37 Port Wakefield Road, Gepps Cross SA 5094

Customer Care: 13 73 28

Email: customer care.au@se.com

Warranty: <https://www.clipsal.com/warranty>

www.clipsal.com

Schneider Electric (NZ) Ltd

Level 2, Building 6, 60 Highbrook Drive

Highbrook, Auckland 2013

Customer Care: 0800 652 999

Email: sales@nz.schneider-electric.com

Warranty: <https://www.se.com/nz/en/about-us/legal/terms-and-conditions.jsp>

www.pdl.co.nz