



This product must be installed by a licensed electrician

Features

- Zigbee 3.0 compliant
- No neutral wire required
- Trailing edge dimmer
- Interchangeable with most popular brands
- White LED to indicate switch status
- Includes push button
- Extra slim dial
- Combination head screws
- On/off & dimming control via the app
- Compatible with most popular brands, including 1, 2 or 3 gang
- Customizable timers & schedules via the app
- Works with both Amazon Alexa and Google Assistant
- 3 year in-home warranty




Network/Device Requirements

Connectivity	Zigbee
Requirements	Mercator Ikuü Zigbee hub
Protocol	IEEE 802.15.4
Wireless Frequency	2.4GHz
App Requirements	Mobile device running iOS or Android. (Refer to ikuu.com.au for minimum specs)

Technical Specifications

Neutral Required	No
Supply Voltage	230 - 250V a.c. 50Hz
Standby Wattage	< 1W
Operating Load	LED: 5W -200W Incandescent: 5W -200W
Dimming method	Trailing edge
Output Power	0-100% (limits set via app)
IP Rating	IP20 (Indoor use only)
Terminal Size	3.5mm ² (can fit up to 3 x 1.5mm ² wires per terminal)
Colour	White button, Yellow housing
Rear Colour	Yellow
Housing Material	Polycarbonate
Contact Material	Brass
Weight	39g
Dimensions	24mm x 40mm x 60mm
Compliance / Standards	AS/NZS 4268, AS/NZS 60669.1, AS/NZS 60669.2.1, AS/NZS 2772.2, CISPR 15, CISPR 32

Wiring Diagram

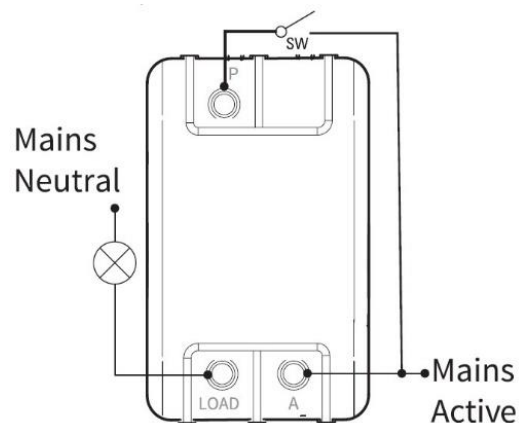

This product is valid for 3 years in-home warranty from the date of purchase. Please retain proof of purchase and certificate of compliance from the installation to make a claim. Please visit <https://www.mercator.com.au/product-support/warranty> for more information. For Mercator Ikuü contractor or end consumer support please visit www.ikuu.com.au or contact our customer service team on 1300 552 255 or via email at customercare@mercator.com.au

*Download the app using the QR code or visit the iOS or Google Play store.