

ECO LED WEATHERPROOF BATTEN

Features


- Durable PC polycarbonate body and diffuser for impact and element protection
- Lumen efficacy: 110lm = per W
- CRI: >80Ra
- 12mm² four terminal wiring block
- Precision lock tombstone lamp holders
- Safety clips and lanyards secure fitting while mounted for easy maintenance
- 20mm cable entry at opposite ends of body (nylon gland and plug included)
- Daylight LED lamps included
- Average lifetime: 40 000 hours
- Prewired emergency configurations available

Specifications

Installation: Surface mount | suspended
 Body and Diffuser: PC polycarbonate
 Gear Tray: Powder coated aluminium
 Clips and Brackets: Stainless steel 316
 Nylon Cable Gland: 16mm
 Light Category: LED—SMD 2820
 Lamp Type: Linear T8 (T26) G13 base
 Lamp AC: L + N One End (Single End)
 Input Voltage: 220–240Vac 50/60Hz
 Driver Type: Non-dimmable
 Driver mA: 5mA per Watt
 Operating Temperature: -10°C—45°C
 Operating humidity: 0-95%
 Ingress Protection: IP65
 Impact Protection: IK08

Application

Ideal for temporary and/or permanent lighting in domestic, commercial and moderate industrial areas

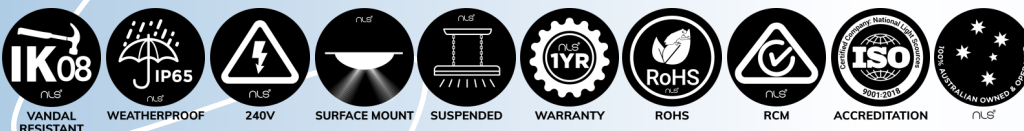

Code	Watts	Lumens	Length	Width	Height	Mount	Finish
NLS20126	1 x 10W	1050lm	665	86	90	360	Cool Grey
NLS20128	1 x 18W	1900lm	1265	86	90	850	Cool Grey
NLS20219	2 x 10W	2100lm	665	136	90	360	Cool Grey
NLS20218	2 x 18W	3800lm	1265	136	90	850	Cool Grey