


15 Coombes Drive, Penrith, NSW, 2750, Australia
e: sales@nlsight.com.au Tel: 02-4732 5444

Surge Protector Spec's

Mole	1p,2p,3p,4p,1P+N,3P+N
Max. continuous operating AC Voltage (Uc)	250V-385V
Max. continuous operating DC Voltage (Uc)	470V-500V
Nominal discharge current(8/20μs)	20KA
Max. discharge current (8/20μs)	40KA
Response time (ta)	25ns
operation temperature range (tu)	-40°C---- 80°C

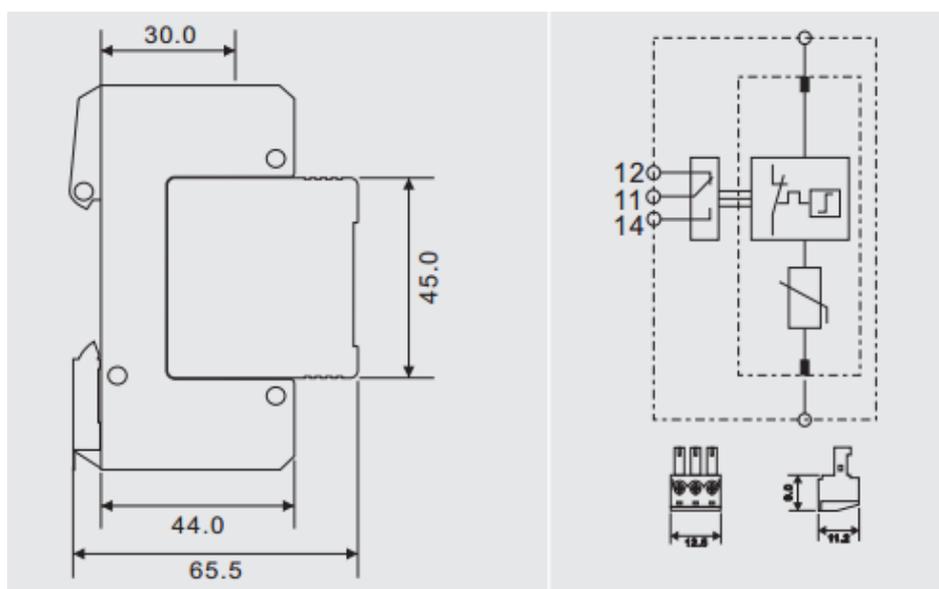

Note: Must be installed by a qualified electrician only

Warranty: 12 months from date of purchase.