


Product data sheet

Characteristics

CPL7000LED

LED downlight, Airflow, 15W, 1500lm, 5700K, white

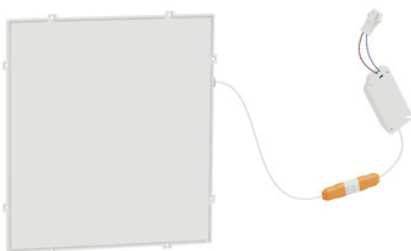

Main

Range	Airflow
Product or component type	Downlight
Device application	Lighting
Market segment	Residential
Main colour tint	White
Colour tint	White

Complementary

Device mounting	Recessed ceiling
Rated power in W	15 W
Light source	LED
Total system power	230/240 V AC 50 Hz
Luminous flux	1500 lm 5700 K cool white
Colour rendering index	R _a =80
Bulb lifespan	50000 h
Load type	230 V AC LED lamp
Trim width	300 mm
Trim height	130 mm

Environment

Unified glare rating	< 22
----------------------	------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7 cm
Package 1 Width	31 cm
Package 1 Length	34 cm
Package 1 Weight	620 g
Unit Type of Package 2	CAR
Number of Units in Package 2	4
Package 2 Height	29 cm
Package 2 Width	32 cm
Package 2 Length	35 cm
Package 2 Weight	3.08 kg
Unit Type of Package 3	PAL
Number of Units in Package 3	108
Package 3 Height	110 cm
Package 3 Width	114 cm

Package 3 Length	114 cm
Package 3 Weight	94 kg

Offer Sustainability

EU RoHS Directive	Under investigation
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
