



**PIXIE MASTER**

**PIXIE GATE & DOOR CONTROL  
PC206GD/R/BTAM**

SMART HOME gate and garage door control for diverse applications

**Application**


Ideal for motorised gate, garage door control or other applications that requires dry contact signal to open/close and contact sensor to monitor the open/close status




**Design Specifications**

- Operates with up to 2 contact sensors/reed switch (sold separately), to monitor the open/close status, and control up to 2 garage doors
- Double insulated
- Designed with two test buttons and LED indicators for easy commissioning

**Buttons and terminals**

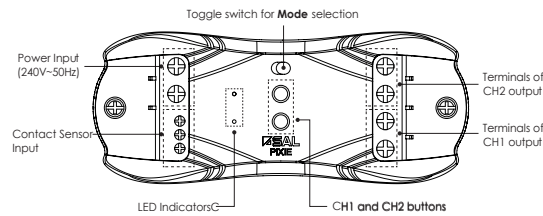

**Wiring diagram**

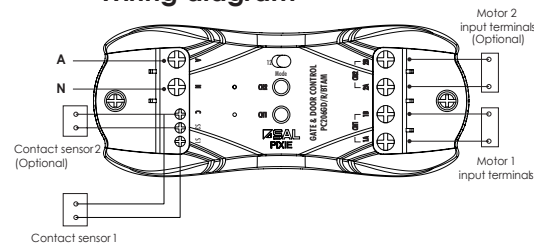

**Technical Specifications**

Model No.	Description	Input (V)/(Hz)	Standby Power (W)	Dimensions (L x W x H mm)	Wireless
PC206GD/R/BTAM	GATE & DOOR CONTROL	240/50	Max. 0.5	110 x 40 x 26	Bluetooth Mesh Technology



**PIXIE MASTER**

**PIXIE CONTACT SENSOR TRANSCIVER  
PC100CS/R/BTAM**

SMART HOME receives contact sensor status and report to PIXIE system

**Application**


Ideal for residential and commercial applications where monitoring door/window's open/close status is required, ideal for security




**Design Specifications**

- Connect with 1 contact sensor/reed switch (sold separately), monitor live status
- Trigger events within PIXIE system
- Trigger events of other system (3rd party integration required)
- Double insulated

**Buttons and terminals**

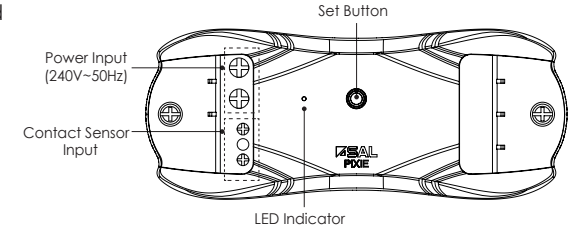

**Wiring diagram**

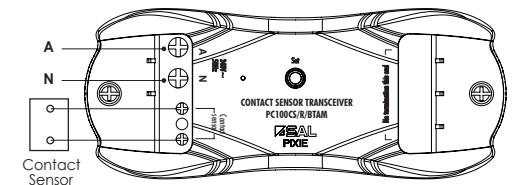

**Technical Specifications**

Model No.	Description	Input (V)/(Hz)	Standby Power (W)	Dimensions (L x W x H mm)	Wireless
PC100CS/R/BTAM	CONTACT SENSOR TRANSCIVER	240/50	Max. 0.5	110 x 40 x 26	Bluetooth Mesh Technology

For terms of catalogue data use, refer to INDEX

