

SPECTRE (16W)

XCLS1



120°



IP20



COLOUR
TEMP. ADJUSTABLE



SMD LED




SURFACE
MOUNTED

DESCRIPTION

The XLED Spectre surface mounted LED Oyster fitting has sleek and elegant design and feel while using energy saving LED. Opal diffuser, with pressed metal powder coated base, this durable, efficient surface oyster fitting suits many simple applications.



PHOTOMETRIC DIAGRAM (4000K)

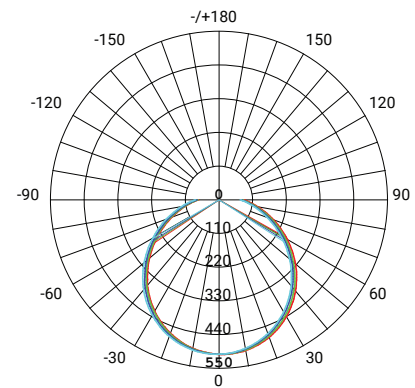

UNIT:cd
 — C0/180,117.1deg
 — C30/210,116.7deg
 — C60/240,116.6deg
 — C90/270,116.8deg

PHOTOMETRIC DATA

Efficacy	≥90
CCT	3000/4000/5700K
CRI	≥80
Beam Angle (°)	120°
LED Type	SMD3825

KEY INFORMATION

Model	XCLS1
Power (W)	16W
Lumens (lm)	~1440/1570/1450lm
Construction	Powder coated steel body Opal diffuser
Dimming Options	Non-dimmable
Fitting Colour	White
IP Rating (IP)	IP20
Lifespan (hrs)	50,000hrs
Dimensions (mm)	Ø350mm x H160mm
Mounting	Surface mounted
Control Gear	Integral electronic LED driver

Additional:

Twist lock removable diffuser

3 Year replacement warranty on fitting

DIAGRAM(S)/ADDITIONAL

