

XLED CYCLONE

XVC600



IP54



TRICOLOUR
TEMP. ADJUSTABLE




SMD LED



SURFACE
MOUNTED


PHOTOMETRIC DIAGRAM (4000K)

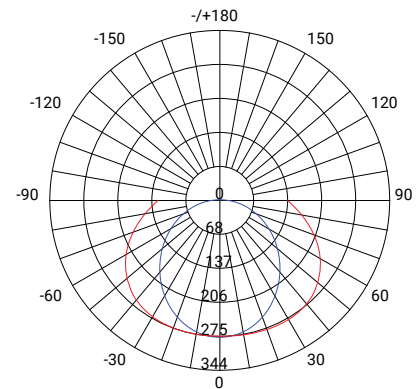

PHOTOMETRIC DATA

Efficacy (lm/W)	≥75
CCT	3000K/4000K/5700K
CRI	≥80
Beam Angle (°)	110°
LED Type	SMD2835

DIAGRAM(S)

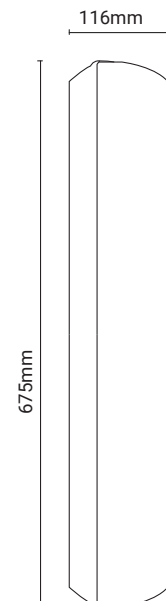

DESCRIPTION

The XLED Cyclone is a surface mounted, sealed vandal resistant luminaire. The high impact resistant body is made from injection moulded polycarbonate base and diffuser.



KEY INFORMATION

Model	XVC600
Power (W)	12W
Lumens (lm)	850lm/900lm/950lm
Construction	Polycarbonate body Opal polycarbonate diffuser
Dimming Options	Non-dimmable
Fitting Colour	Grey
IP Rating (IP)	IP54
Lifespan (hrs)	30,000hrs
Dimensions (mm)	L675mm x W96mm x H116mm
Mounting	Surface mounted
Control Gear	Integral electronic LED driver

Additional:

- 3 Years replacement warranty on fitting.