

ECLIPSE (10W)

XFLE10



120



IP65



COLOUR
TEMP 4000K




SMD LED



SURFACE
MOUNT

PHOTOMETRIC DIAGRAM

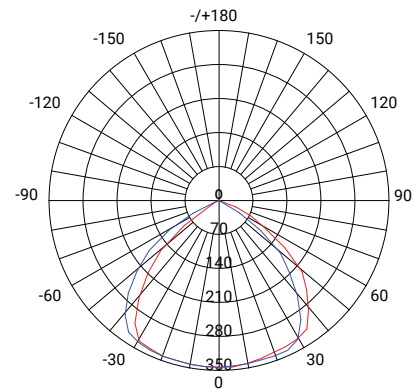

PHOTOMETRIC DATA

Efficacy (lm/W)	≥100
CCT	4000K
CRI	≥80
Beam Angle (°)	120°
LED Type	SMD2835

DESCRIPTION

The XLED ECLIPSE series of floodlights are robust high-performance LED floodlights, which are ideal for commercial buildings, security lighting, sign illumination and public areas applications as well as residential applications.

Available in many wattages & sizes, the eclipse series not only provides great lighting solutions, BUT also fits many budgets.



KEY INFORMATION

Model	XFLE10
Power (W)	10W
Lumens (lm)	~1000lm
Construction	Die cast aluminium body Aluminium reflector Tempered glass diffuser
Dimming Options	Non-dimmable
Fitting Colour	Black
IP Rating (IP)	IP65
Lifespan (hrs)	40,000hrs
Dimensions (mm)	L102.9 x W82.9mm x H24mm
Mounting	Surface mounted
Control Gear	Integral Electronic inbuilt constant current LED driver

Additional:

3 Year replacement warranty on fitting

Specification subject to change without prior notice.

DIAGRAM(S)

